

# AMORIM CORK SOLUTIONS



## Cork FUSION 600 6mm Cork/EVA Blend Underlayment

### Sizes:

24" and 36" Sheets

### Composition:


65% Cork + 35% Recycled HD EVA Foam

### Versatile:

Use with Wood or Ceramics

### Properties:

Equivalent Acoustical/Physical Properties

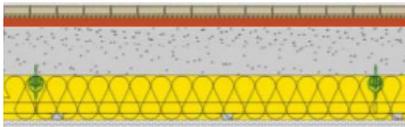


- 14 mm Floating Engineered Hardwood
- Cork Fusion 600
- 5.5" Concrete Slab Subfloor
- Suspended Drywall Ceiling Assembly

IIC 73 / STC 70  
Delta IIC 40 (incl ceiling assy)



- 12.7 mm Floating Engineered Hardwood
- Cork Fusion 600
- 6 mil PE Vapor Barrier
- 6" Concrete Slab Subfloor
- No Ceiling

IIC 52 / STC 51  
Delta IIC 22

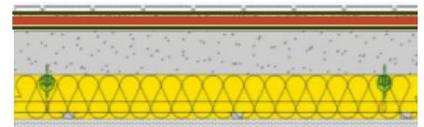

- 3/8" (9.5 mm) Ceramic Tile
- Modified Thin Set Mortar
- Cork Fusion 600
- Type I Ceramic Tile Adhesive
- 6" Concrete Slab Subfloor
- Suspended Drywall Ceiling Assembly

IIC 63 / STC 61